



*This 43 foot state-of-the-art roll mill at Timely's Pacoima, California, plant was designed specifically to produce the Frame-Up adjustable kerf steel door frame. Timely, an industry leader for over 30 years, is recognized as the originator of the prefinished drywall frame concept and widely respected for its innovative ideas, products and applications.*



**FRAME-UP**<sup>™</sup>  
ADJUSTABLE KERF STEEL DOOR FRAMES BY  
**TIMELY**

818-492-3546 Ext. 3444 / Fax 818-492-3551  
 The Timely trademark is used under license from SDS Industries Inc.  
[www.TimelyFrames.com](http://www.TimelyFrames.com)

**FRAME-UP**<sup>™</sup>  
ADJUSTABLE KERF STEEL DOOR FRAMES BY  
**TIMELY**





# Frame-Up. The Ultimate Adjustable Kerf Steel Door Frame

Unmatched adjustability, ease of installation and reliability distinguish the Frame-Up™ kerf steel door frame by Timely®. Designed and manufactured for a full range of residential and commercial installations in wood or steel stud construction, Frame-Up™ features a full 1" of adjustability to accommodate most variations in wall construction. An extensive door frame industry background, engineering excellence, and thorough testing enable this frame to meet most stringent code requirements including the proper closing and latching specified for a full 90-minute fire rating.

**Available Strike Preps**  
2 1/4" Full-Lip Strike, 2 3/4" T-Strike,  
2 3/4" Deadbolt, 4 7/8" ASA.

**TA-1 Adjustable T-Strikes**  
1/4" of adjustment allows for ease of field installations for proper door closure.

Available in Brass, Bronze, Zincrome, Oil Rubbed Bronze, Bright Chrome, Bright Brass, Antique Brass.

## CASING OPTIONS



TA-8

T-30

Exterior Brickmould

Wood trim and brickmould can be easily applied to the frame without the need for custom millwork.

## TIMELY CASINGS



TA-8 Standard Steel Casing



TA-30 Colonial Steel Casing

The TA-8 Standard steel casing enhances any commercial or residential setting. The TA-30 Colonial steel casing adds a special warmth for assisted living, motels and hotels, offices, apartments and homes. For steel casing, use our TA-18 retainer clips.

## WEATHERSTRIPPING

These seals comply with the requirements of Underwriters Laboratories UL 10C and UBC 7-2-79, GVIY, file #R14384. Colors: black, white, bronze, beige.

## APPLICATIONS

- Multi-Family • Assisted Living • Motel/Hotel
- House to Garage • Garage to Exterior



## FIRE LABELS

90 Minute Fire Rating up to 3'0" x 8'0" Single and up to 6'0" x 7'0" Double.



## STRUCTURAL PERFORMANCE AND IMPACT RATING

Design pressure ratings available for compliance with national, state and local wind load and/or missile requirements.

Product approval under the Miami-Dade BCCO NOA or Intertek-testing Services/Warnock Hersey® programs.

## CLOSURE TEST


In a 90-minute application, the door will close and latch from 18" if the following components are used: QEBD500 Foam-filled Compression Weatherstripping and TA-1 Adjustable T-Strike while keeping proper interference between sweep and sill.

## DOOR SELECTION

Frame-Up is available in either right or left hand, both inswing and outswing, for use with any entry door. Available in 6-8, 7-0 and 8-0 heights. Fits wall sizes from 4 1/2" thru 10 1/2" based on 1" increments.

Closure Adjustment Chart		
Adjustment Range	Part No.	Dimension 'A'
4 1/2" to 5 1/2"	C53	1 7/8"
5 1/2" to 6 1/2"	C63	2 7/8"
6 1/2" to 7 1/2"	C73	3 7/8"
7 1/2" to 8 1/2"	C83	4 7/8"
8 1/2" to 9 1/2"	C93	5 7/8"
9 1/2" to 10 1/2"	C103	6 7/8"

**Outer Adjustable Closure**  
2 uprights - 1 header

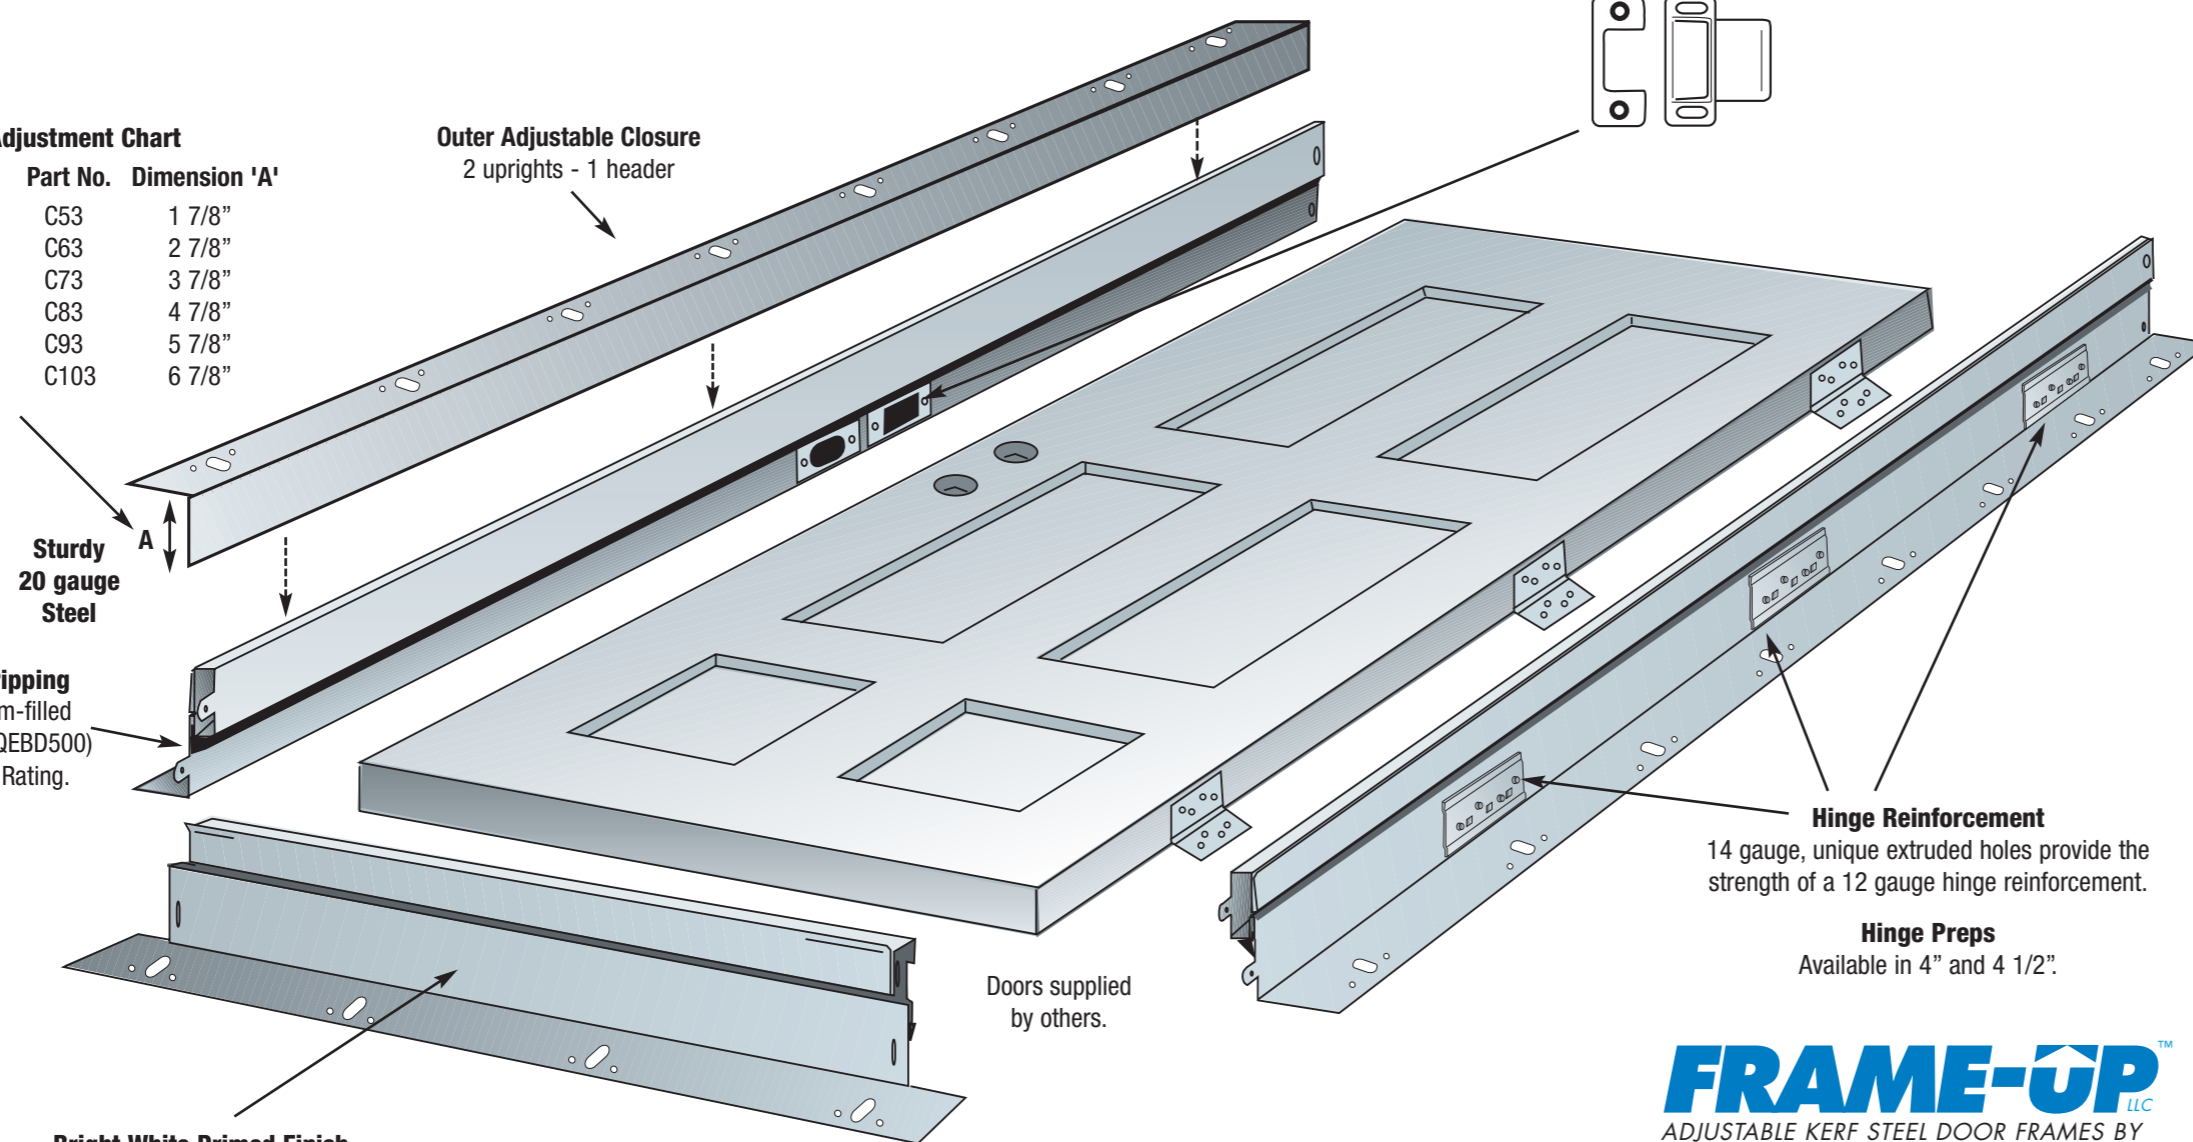

**Sturdy 20 gauge Steel**

**Weatherstripping**  
Schlegal foam-filled compression (QEBD500)  
90 Min. Fire Rating.

**Bright White Primed Finish**  
Galvanized 20-gauge steel to provide superior corrosion resistance and an optimal surface for painting.

Doors supplied by others.

**Hinge Reinforcement**  
14 gauge, unique extruded holes provide the strength of a 12 gauge hinge reinforcement.

**Hinge Preps**  
Available in 4" and 4 1/2".

